



# Kingfisher Lighting

## Datasheet

### Helvellyn

This stainless steel LED bollard has a controlled output for optimum performance.

#### Key Features

- Luminaire Lumens 1,322
- Efficacy 66.1 luminaire lm/W
- 4000K, CRI >70
- Lifetime >50,000hr L70
- Flange plate mounted



#### Optics

**Helvellyn**

Symmetrical polycarbonate lens


#### Applications

- Urban environment
- Residential
- Hospitality & leisure
- Retail
- Commercial
- Pathways & parks

## Specification Text

The luminaire shall be manufactured from stainless steel. The LED version shall have a luminous efficacy up to 66.1 lm/W and will be capable of producing up to 1,322 luminaire lumens at 4000K with a CRI>70. The luminaire will be rated at IP65.

## Dimensions

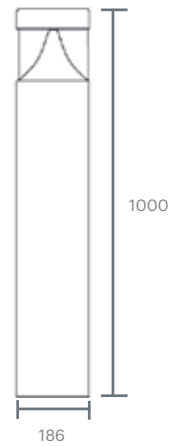

All units of measurement in mm.



## Specifications

Weight	7.7-8.7 kg	Stainless
Material	steel	Stainless
Paint Finish	steel/silver	

Code	Power	Light Source	Luminaire Lumens	Optic	CCT(K)	IP	IK	Weight (kg)	Paint Finish	Product Type
LED										
BSS1020LEDF	20W	LED	1322	Symmetrical polycarbonate lens	4000	IP65	IK08	7.00	Silver	Standard 20W
BSS1020LEDFEM	20W	LED	1322		4000	IP65	IK08	7.00	Silver	Emergency option

Codes with **EM** at the end relate to emergency version of fitting

## Accessories / Options

Emergency option	See specification table
Bolt-on root	Contact us for details