



Kingfisher Lighting

Datasheet

Zactis

Zactis is a high-performance flat-to-ground LED flood light perfect for sports, high mast and area applications. As well as facilitating easy installation and maintenance, the sleek, low-profile design, reduces the load together with decreasing windage.



Key Features

- Luminaire efficacy up to 114.3 lm/W
- 760mA
- 4000K, CRI >70
- Lifetime >84,000hr L90 - LM80
- Stirrup mounted
- DALI dimmable as standard
- Plug and socket connection
- Photocell and NEMA options
- Asymmetrical distribution with the peak at 70 degrees allowing flat-to-ground orientation



Optics

Zactis

Asymmetrical illumination

Applications


- Sports
- High mast lighting
- Car parks
- Area lighting
- Security

Specification Text

The luminaire shall be manufactured from high pressure die-cast aluminium. It shall have a luminaire efficacy of up to 114.3 luminaire lm/W and will be capable of producing up to 32,571 luminaire lumens at 4000K. The luminaire will be rated at IP65 and IK08.

With a peak intensity of 70°, Zactis achieves excellent performance while still complying with BREEAM & the ILP guidance notes on obtrusive light.

Dimensions

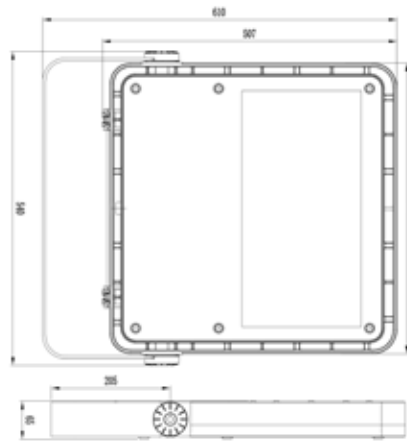

All units of measurement in mm.



Specifications

Weight	14.5-16.4 kg
Windage	0.04m ²
Material	Die-cast aluminium
Paint Finish	Anthracite grey

Code	Power	Light Source	Luminaire Lumens	Optic	CCT(K)	IP	IK	Weight (kg)	Paint Finish	Product Type
ZAC-ASY-4.7-64D	142W	LED	16286	Asymmetrical 70° wide illumination	4000	IP65	IK08	14.50	Anthracite grey	Dimmable
ZAC-ASY-4.7-64DPEC	142W	LED	16286		4000	IP65	IK08	14.60	Anthracite grey	Photocell
ZAC-ASY-4.7-128D	285W	LED	32571		4000	IP65	IK08	16.30	Anthracite grey	Dimmable
ZAC-ASY-4.7-128DPEC	285W	LED	32571		4000	IP65	IK08	16.40	Anthracite grey	Photocell

Codes with **PEC** at the end relate to photocell option

Accessories / Options

Paint finish options	Contact us for details
Bracket option	Contact us for details