

Datasheet

Atlas



Product Description

A robust bulkhead with both microwave and emergency options available.

Specification Text

The luminaire shall be manufactured from polycarbonate. It shall have an LED efficacy of up to 100lm/W and will be capable of producing up to 2100 luminaire lumens at 4000K with a CRI >80. It shall have a symmetric optic and is rated at IP65 and IK08.

Specification

Weight: 1.3 - 1.7kg
Material: Polycarbonate Housing
Paint finish: RAL 9016 Traffic White

Key Features

- 12.5W - 21W
- 1250 - 2100 luminaire lumens
- Efficacy up to 100lm/W
- 4000K, CRI >80
- L70




Mounting Options

- Wall Mount

Other Options

- Microwave options
- Emergency options




Optics



Asymmetrical

Code	Power	Luminaire Lumens	Optic	CCT(K)	IP	IK	Weight kg	Paint Finish	Driver Included
LBH214K	21.0	2,100	Asymmetrical	4000	IP65	IK08	1.3	RAL 9016 Traffic White	Driver Inc
LBH214K3M	21.0	2,100		4000	IP65	IK08	1.3	RAL 9016 Traffic White	Driver Inc

Dimensions

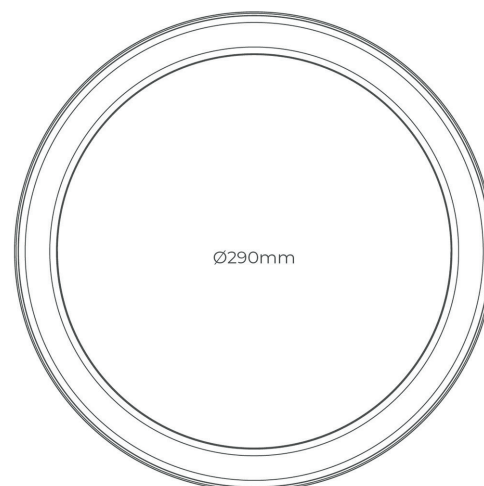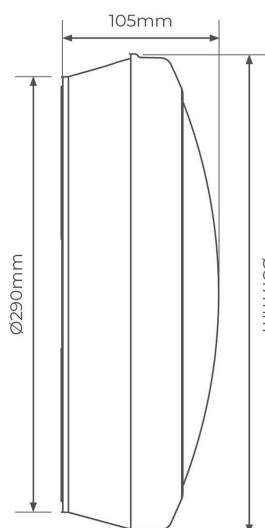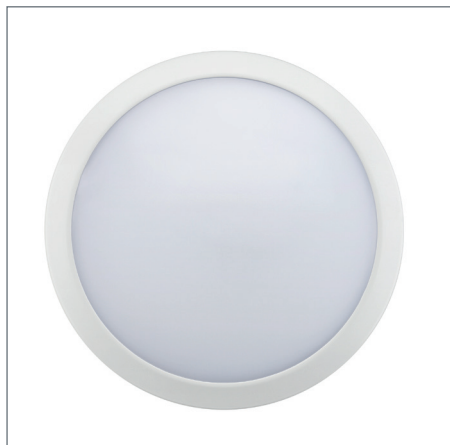

All measurements are in mm