



Kingfisher Lighting

Part of the LUCECO, group of companies

Datasheet



SLOANE 2.0

Specification Text

The SLOANE 2.0 shall be manufactured from high-pressure polycarbonate. It shall have an LED efficacy of up to 73.0 lm/W and will be capable of producing up to 4,005 luminaire lumens at 4000K with a CRI >70. It shall have symmetrical optics and is rated at IP65 and IK10.

Specification

Weight:	12.5 - 12.6 kg
Windage:	0.17 m ²
Material:	Polycarbonate
Paint Finish:	RAL7016 Anthracite Grey

Product Description


SLOANE 2.0 is the spherical post top luminaire with optimised lumen packages to ensure excellent light distribution for large amenity luminaires.



Key Features

- 35.0W - 55.0W
- 2,548 - 4,005 Luminaire Lumens
- Efficacy up to 73.0 lm/W
- 4000K, CRI >70
- IP65, IK10
- Lifetime > 100,000hr L90
- Photocell Options

Optics



Symmetrical

IP65	IK10	100,000 hrs LIFETIME		
PEC	2700K	4000K	5 YEARS WARRANTY	<input type="checkbox"/>

Other Options Available

Contact for further details


- Photocell Options

Body Type	A	B	C	D
Standard	500	500	520	76

All measurements in mm

Mounting Options

- Post Top 76mm

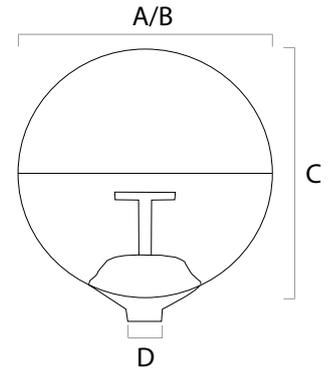

Code	Power	Luminaire Lumens	Drive Current	Inrush Current A pk	Optic	CCT(K)	IP	IK	Weight kg	Driver Included	Driver Type
SLOA35F	35.0	2,548	700	5.0	Symmetrical	4000	IP65	IK10	12.5	Yes	Fixed
SLOA35PEC	35.0	2,548	700	5.0		4000	IP65	IK10	12.6	Yes	Fixed
SLOA55F	55.0	4,005	1,050	5.0		4000	IP65	IK10	12.5	Yes	Fixed
SLOA55PEC	55.0	4,005	1,050	5.0		4000	IP65	IK10	12.6	Yes	Fixed