



Kingfisher Lighting

A division of the LUCECO group

Datasheet

ARKA DS



Specification Text

The ARKA DS shall be manufactured from die-cast aluminium and powder coated in RAL 7016 Marine Grade Finish. It shall have a power output ranging up to 26.0W, with an efficacy of 102.0lm/W. The luminaire shall deliver 511 - 2,556 luminaire lumens.

Available in 2700K, the luminaire shall be IK08 and IP66 rated. It shall have photocell and emergency options available.

Specification

Weight:	5.8 kg
Material:	Die-cast Aluminium
Paint Finish:	RAL7016 Anthracite Grey

Product Description

ARKA DS is a Dark Sky Compliant bollard with adjustable output and a range of accessory options, making it ideal for pathways, landscaped areas and other outdoor environments.




A division of the LUCECO group


Key Features

- 5.0W - 26.0W
- 511 - 2,556 Luminaire Lumens
- Efficacy of up to 102.0 lm/W
- 2700K, CRI>80
- IP66, IK08
- Lifetime > 100,000 hrs, L80, B50
- Emergency Compatible
- Switchable Distribution - SY/ASYM


Optics



Asymmetric Optic



Symmetric Optic

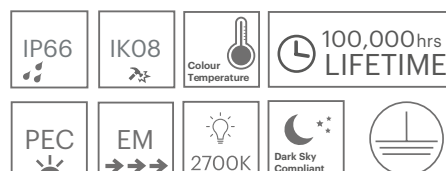

Other Options Available

Contact for further details

- Photocell Options
- Emergency Options
- 4000K Option

Mounting Options

- Flange Mount

Dimensions

Body Type	A	B	C
Standard	185	0	1067

All measurements in mm



Code	Power (W)	Luminaire Lumens (lm)	Drive Current (mA)	Inrush Current (A pk)	Optic	CCT (K)	IP	IK	Weight (kg)	Driver Included	Driver Type
ARKDS-AYSY-727-05D-01	5.0	511	130	20.8	Asymmetric/ Symmetric Optic	2700	IP66	IK08	5.8	Y	DALI
ARKDS-AYSY-727-05DEM-01	5.0	511	130	20.8		2700	IP66	IK08	5.8	Y	DALI
ARKDS-SY-727-05DPEC-01	5.0	511	130	20.8		2700	IP66	IK08	5.8	Y	DALI
ARKDS-SY-727-05DEMPEC-01	5.0	511	130	20.8		2700	IP66	IK08	5.8	Y	DALI
ARKDS-AYSY-727-13D-01	13.0	1278	325	20.8		2700	IP66	IK08	5.8	Y	DALI
ARKDS-AYSY-727-13DEM-01	13.0	1278	325	20.8		2700	IP66	IK08	5.8	Y	DALI
ARKDS-SY-727-13DPEC-01	13.0	1278	325	20.8		2700	IP66	IK08	5.8	Y	DALI
ARKDS-SY-727-13DEMPEC-01	13.0	1278	325	20.8		2700	IP66	IK08	5.8	Y	DALI
ARKDS-SY-727-26D-01	26.0	2556	650	20.8		2700	IP66	IK08	5.8	Y	DALI
ARKDS-SY-727-26DEM-01	26.0	2556	650	20.8		2700	IP66	IK08	5.8	Y	DALI
ARKDS-SY-727-26DPEC-01	26.0	2556	650	20.8		2700	IP66	IK08	5.8	Y	DALI
ARKDS-SY-727-26DEMPEC-01	26.0	2556	650	20.8		2700	IP66	IK08	5.8	Y	DALI