



Datasheet

CIVICA 2.0



Specification Text

The CIVICA 2.0 shall be manufactured from die-cast aluminium and powder coated in RAL 7016 Marine Grade finish. It shall have a power output ranging between 40 - 60W, with an efficacy of 112lm/W. The luminaire shall deliver 4,048 - 6,600 luminaire lumens. The CIVICA 2.0 has symmetric optics to suit pathway applications. Available in 4000K, the luminaire shall be IK08 and IP66 rated. It shall have photocell available.

Specification

Weight:	10.4 kg
Windage	0.15 m ²
Material:	Die-cast Aluminium
Paint Finish:	RAL7016 Anthracite Grey
Embodied Carbon:	88 - 90 kg CO ² e

Product Description




A classic amenity luminaire, CIVICA 2.0 has low colour temperature options alongside an anti glare diffuser to create the ultimate human-centric scheme.

Key Features


- 40.0W - 60.0W
- 4,048 - 6,600 Luminaire Lumens
- Efficacy up to 112.0 lm/W
- 2700K, 4000K, CRI>70
- IP66 & IK08
- Lifetime 100,000, L80
- Anti-Glare Diffuser
- Dim to Warm Option

Optics



Symmetrical 90°

Created to suit many areas of the public realm, this symmetric optic offers a powerful light distribution.

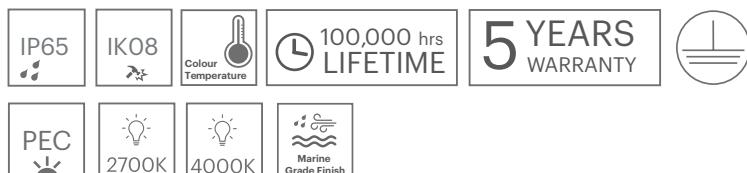

Circular Economy Score

0 to 0.05	Very poor circular economy performance
0.5 to 1.5	Some circular economy functionality
1.5 to 2.5	Definite/substantial progress to circularity
2.5 to 4.0	Excellent circularity

Other Options Available

Contact for further details


- Photocell Options
- Dim to Warm

Mounting Options

- Post Top 76mm

Body Type	A	B	C	D
Standard	600	600	426	60/76

All measurements in mm

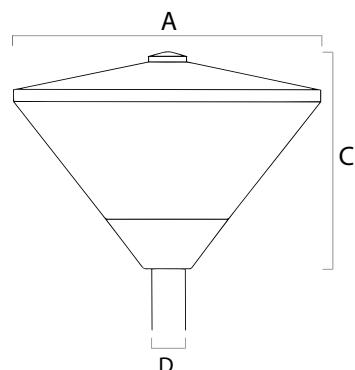

Code	Power (W)	Luminaire Lumens (lm)	Drive Current (mA)	Inrush Current (A pk)	Optic	CCT(K)	IP	IK	Weight (kg)	Driver Included	Driver Type
CIV40D-02	40.0	4,400	1,050	25.0		4000	IP65	IK08	10.4	Yes	DALI
CIV40D27K-02	40.0	4,048	1,050	25.0	Symmetrical Optic - 90°	2700	IP65	IK08	10.4	Yes	DALI
CIV60D-02	60.0	6,600	610	32.0		4000	IP65	IK08	10.4	Yes	DALI
CIV60D27K-02	60.0	6,072	610	32.0		2700	IP65	IK08	10.4	Yes	DALI