



# Kingfisher Lighting

A division of the LUCECO group

## Datasheet

# KRANE




### Specification Text

The KRANE shall be manufactured from die-cast aluminium with an extruded aluminium body and powder coated with a graphite grey or aluminium silver finish. It shall have a power output of 39.0 - 81.0W, with an efficacy of 76.0 lm/W. It shall produce 2,700 - 5,900 luminaire lumens. The KRANE is available with symmetrical optics for urban projects. Available in 3000K or 4000K, the luminaire shall be IK10 and IP66 rated.

### Specification

Weight:	7.3 kg - 12.2 kg
Windage:	0.15 m <sup>2</sup> - 0.25 m <sup>2</sup>
Material:	Die-cast Aluminium
Paint Finish:	Graphite Grey

### Optics

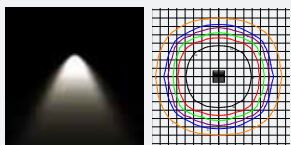

Symmetrical Urban Optic

### Product Description



With a contemporary design, KRANE offers an ultra modern aesthetic to any urban landscape. Available with a choice of output, colour temperature and low glare solutions.

### Key Features

- 39.0W - 81.0W
- 2,700 - 5,900 Luminaire Lumens
- Efficacy up to 76.0 lm/W
- 3000K, 4000K, CRI>80
- IP65, IP66, IK08, IK10
- Lifetime >60,000, L80
- Single or Double Illumination

IP65	IP66	IK08	IK10	Colour Temperature
5 YEARS WARRANTY		60,000 hrs LIFETIME		

## Other Options Available

Contact for further details


- Colour Temperatures: 3000K, 4000K

Body Type	A	B	C
KRANE Single	950	296	102
KRANE Double	1600	296	102

All measurements in mm

## Mounting Options

- Post Top 60mm

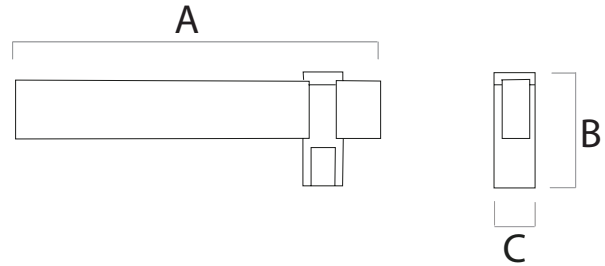

Code	Power (W)	Luminaire Lumens (lm)	Drive Current (mA)	Optic	CCT(K)	IP	IK	Weight (kg)	Driver Included	Driver Type
KRA-SYU-840-39-16	39.0	2,950	-	Symmetrical Urban Optic	4000	IP66	IK10	7.3	Yes	Fixed
KRA-SYU-830-39-16	39.0	2,700	-		3000	IP66	IK10	7.3	Yes	Fixed
KRAD-SYU-840-81-16	81.0	1,400	-		4000	IP66	IK10	12.2	Yes	Fixed
KRAD-SYU-830-81-16	81.0	700.0	-		3000	IP66	IK10	12.2	Yes	Fixed