



Kingfisher Lighting

A division of the LUCECO group

Datasheet

ELLIS Series



Specification Text

The ELLIS shall be manufactured from die-cast aluminium and powder coated with a graphite grey or aluminium silver finish. It shall have a power output ranging between 7.0 - 40.0W, with an efficacy up to 98lm/W. It shall deliver 575 - 3,900 luminaire lumens. The ELLIS has a range of different beam angles and both one and two way illumination. Available in 3000K or 4000K, the luminaire shall be IK07 and IP65.

Specification

Weight:	0.9 - 5.5 kg
Windage:	0.02 - 0.09 m ²
Material:	Die-cast Aluminium
Paint Finish:	Aluminium Silver

Product Description





ELLIS is the façade luminaire designed to accentuate your architectural structures. With the option of one or two way illumination the ELLIS series gives a stunning asymmetrical distribution.


Key Features

- 7.0W - 40.0W
- 575 - 3,900 Luminaire Lumens
- Efficacy up to 98.0 lm/W
- 3000K, 4000K, CRI>80
- IP65, IK07
- Lifetime < 60,000hrs, L80
- Colour Temperature



Optics



Symmetrical 37°



Symmetrical 37 + 37°



Symmetrical 29°



Other Options Available

Contact for further details


- Colour Temperatures: 3000K, 4000K
- Emergency Options Available (on request)

Mounting Options

- Wall Mount

Body Type	A	B	C
ELLIS 1 - One Way	100	110	230
ELLIS 1 - Two Way	100	110	330
ELLIS 2 - One Way	200	210	285
ELLIS 2 - Two Way	200	210	455

All measurements in mm

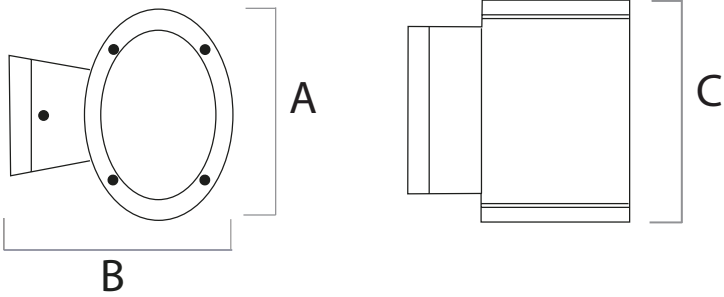

Code	Power (W)	Luminaire Lumens (lm)	Drive Current (mA)	Optic	CCT(K)	IP	IK	Weight (kg)	Driver Included	Driver Type
ELL1-1W-SY37-840-7-21	7.0	575	350	Symmetrical 37°	4000	IP65	IK07	0.9	Yes	Fixed
ELL1-2W-SY37-840-13-21	13.0	1,150	350	Symmetrical 37° + 37°	4000	IP65	IK07	1.12	Yes	Fixed
ELL2-1W-SY29-840-20-21	20.0	1,950	-		4000	IP65	IK07	4.9	Yes	Fixed
ELL2-2W-SY29-840-40-21	40.0	3,900	-	Symmetrical 29°	4000	IP65	IK07	5.5	Yes	Fixed