



Kingfisher Lighting

A division of the LUCECO group

Datasheet

ATLAS Extra



Specification Text

The ATLAS Extra luminaire shall be manufactured from die-cast aluminium with an anthracite grey finish. It shall feature a power output of between 12.0W - 19.0W with an efficacy of up to 110.0 lm/W and will be capable of producing up to 2,100 luminaire lumens at 4000K with a CRI >80. It shall have a symmetric optic and is rated at IP65 and IK08.

Specification

Weight: 2.4 - 2.7 kg

Material: Die-cast Aluminium

Paint Finish: RAL 7016 Anthracite Grey

Product Description

LUCECO


A simple yet classic bulkhead, ATLAS Extra is available in multiple colour temperatures, as well as with photocell and emergency options.

Key Features

- 12.0W - 19.0W
- 1,200 - 2,100 luminaire lumens
- Efficacy up to 110.0 lm/W
- 2700K, 4000K, CRI >80
- Lifetime < 50,000hrs, L70, B50



Optics



Asymmetrical 180x90°

Mounting Options

- Wall Mount


Other Options

- Photocell options
- Emergency options

Body Type	A	B	C	D
Standard	600	600	426	60/76

All measurements in mm

Dimensions

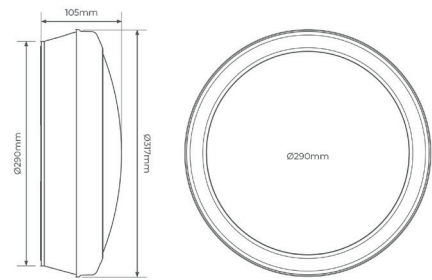

Code	Power (W)	Luminaire Lumens (lm)	Luminaire Efficacy (lm/W)	Optic	CCT(K)	IP	IK	Weight (kg)	Driver Type	Driver Included
LBHXHLS40	12/19	1250/2100	105/110	Asym. 180x90°	4000	IP65	IK08	2.5	Fixed	Yes
LBHXHLS40PC	12/19	1250/2100	105/110		4000	IP65	IK08	2.6	Fixed	Yes
LBHXHLE40	12/19	1250/2100	105/110		4000	IP65	IK08	2.7	Fixed	Yes
LBHXHLE40PC	12/19	1250/2100	105/110		4000	IP65	IK08	2.8	Fixed	Yes
LBHXHLS27	12/19	1200/1800	100/95		2700	IP65	IK08	2.5	Fixed	Yes
LBHXHLS27PC	12/19	1200/1800	100/95		2700	IP65	IK08	2.6	Fixed	Yes
LBHXHLE27	12/19	1200/1800	100/95		2700	IP65	IK08	2.7	Fixed	Yes
LBHXHLE27PC	12/19	1200/1800	100/95		2700	IP65	IK08	2.8	Fixed	Yes
LBHXCLS40	12/19	1250/2100	105/110		4000	IP65	IK08	2.4	Fixed	Yes
LBHXCLS40PC	12/19	1250/2100	105/110		4000	IP65	IK08	2.5	Fixed	Yes
LBHXCLE40	12/19	1250/2100	105/110		4000	IP65	IK08	2.6	Fixed	Yes
LBHXCLE40PC	12/19	1250/2100	105/110		4000	IP65	IK08	2.7	Fixed	Yes
LBHXCLS27	12/19	1200/1800	100/95		2700	IP65	IK08	2.4	Fixed	Yes
LBHXCLS27PC	12/19	1200/1800	100/95		2700	IP65	IK08	2.5	Fixed	Yes
LBHXCLE27	12/19	1200/1800	100/95		2700	IP65	IK08	2.6	Fixed	Yes
LBHXCLE27PC	12/19	1200/1800	100/95		2700	IP65	IK08	2.7	Fixed	Yes