



Kingfisher Lighting

A division of the LUCECO group

Datasheet

LUNIO



Specification Text

The LUNIO shall be manufactured from die-cast aluminium and powder coated with a graphite grey or aluminium silver finish. It shall have power outputs of 30 - 80W, with an efficacy from 85 - 106lm/W. It shall produce 2,550 - 8,400 luminaire lumens. The LUNIO is available with a range of optics for urban projects. Available in 3000K or 4000K, the luminaire shall be IK10 and IP67 rated.

For DarkSky Specifications, the luminaire shall produce a CCT of 3000K.

Specification

Weight: 9.0 kg
Windage: 0.16 m²
Material: Die-cast Aluminium
Paint Finish: Graphite Grey

Product Description




LUNIO is an elegant amenity luminaire, which can be column or wall-mounted. It comes with a radial or 3-way distribution which makes it ideal for paths and parks as well as urban areas.


Key Features

- 30.0W - 80.0W
- 2,550 - 8,400 Luminaire Lumens
- Efficacy up to 106.0 lm/W
- 4000K, CRI>70
- IP65, IP66, IP67, IK08, IK09, IK10
- Lifetime 60,000, L80

Optics



Symmetrical Type V



Asymmetrical Type IV

IP65	IP66	IP67	IK08	IK09	IK10	Colour Temperature
5 YEARS WARRANTY		60,000 hrs LIFETIME				

Other Options Available

Contact for further details


- Colour Temperature Opportunities

Body Type	A	B	C	D
Standard	520	520	377	60

All measurements in mm

Mounting Options

- Post Top 60mm

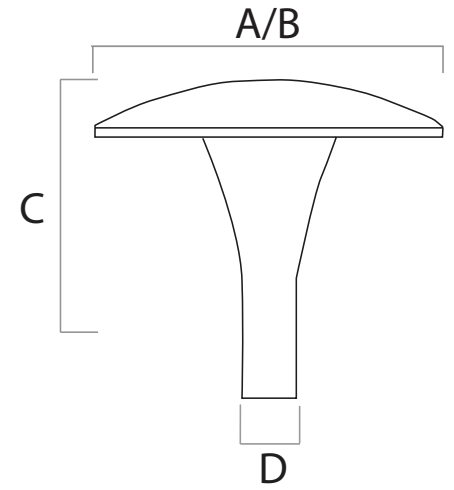

Code	Power (W)	Luminaire Lumens (lm)	Drive Current (mA)	Optic	CCT(K)	IP	IK	Weight (kg)	Driver Included	Driver Type
LUNP-SYV-840-41-16	41.0	4,300	350	Symmetrical Type V	4000	IP66	IK08	9.0	Yes	Fixed
LUNP-SYV-840-57-16	57.0	6,050	350		4000	IP66	IK08	9.0	Yes	Fixed
LUNP-SYV-840-80-16	80.0	8,400	350		4000	IP66	IK08	9.0	Yes	Fixed
LUNC-SYV-840-41-16	41.0	3,950	350		4000	IP67	IK10	9.0	Yes	Fixed
LUNC-SYV-840-57-16	57.0	5,450	350		4000	IP67	IK10	9.0	Yes	Fixed
LUNC-SYV-840-80-16	80.0	7,500	350		4000	IP66	IK09	9.0	Yes	Fixed
LUNP-ASIV-840-30-16	30.0	2,950	350	Asymmetrical Type IV	4000	IP66	IK08	9.0	Yes	Fixed
LUNP-ASIV-840-43-16	43.0	4,050	350		4000	IP66	IK09	9.0	Yes	Fixed
LUNP-ASIV-840-57-16	57.0	5,700	350		4000	IP65	IK08	9.0	Yes	Fixed
LUNC-ASIV-840-30-16	30.0	2,550	350		4000	IP66	IK08	9.0	Yes	Fixed
LUNC-ASIV-840-43-16	35.0	3,600	350		4000	IP66	IK08	9.0	Yes	Fixed
LUNC-ASIV-840-57-16	57.0	4,950	350		4000	IP66	IK10	9.0	Yes	Fixed