



# Kingfisher Lighting

A division of the LUCECO group

## Datasheet

# MIKO Bollard



### Specification Text

The MIKO shall be manufactured from with a die-cast aluminium body with an extruded aluminium pole. It shall be powder coated with a graphite grey or aluminium silver finish. It shall have a power output ranging up to 20.0W, with an efficacy up to 90 lm/W. It shall produce up to 1,800 Luminaire lumens. The MIKO bollard has both radial and one way distributions and produces minimal upward light. The luminaire shall come in 3000K and 4000K and be rated IK08 and IP66 with 300mm, 600mm, 800mm and 1000m heights available.

For DarkSky Specifications, the luminaire shall provide a CCT of 3000K.

### Specification

Weight: 3.5kg  
Material: Die-cast Aluminium  
Paint Finish: Aluminium Silver

### Product Description




The MIKO bollard is a stylish accompaniment for any modern scheme. Combine with the MIKO Wall and Grande to create a modern, yet uniform scheme.

### Key Features

- 20.0W
- 1,800 Luminaire Lumens
- Efficacy of up to 90.0 lm/W
- 3000K, CRI>80
- IP66, IK09
- Lifetime > 60,000 hrs, L80

### Optics

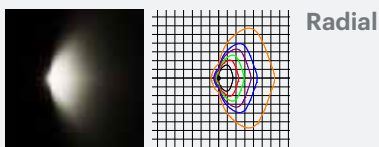

IP66	IK09	Colour Temperature		Anti-glare	
5 YEARS WARRANTY		60,000 hrs LIFETIME			

## Other Options Available

Contact for further details


- Colour Temperature Opportunities

## Mounting Options

- Galvanized, painted steel base plate

Body Type	A	B	C
Standard	200	200	1,000

All measurements in mm

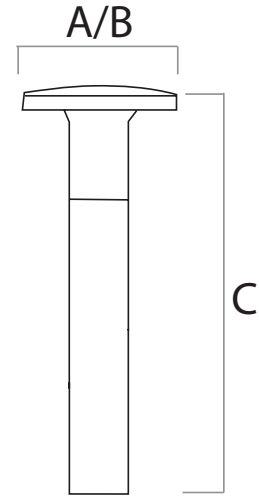

Code	Power (W)	Luminaire Lumens (lm)	Drive Current (mA)	Optic	CCT(K)	IP	IK	Weight (kg)	Driver Included	Driver Type
MIKB1-SYR-840-20-21	20.0	1,800	-	Radial	3000	IP66	IK09	3.45	Yes	Fixed