



Kingfisher Lighting

A division of the LUCECO group

Datasheet

DOT




Specification Text

The DOT shall be manufactured from die-cast aluminium and powder coated with a graphite grey, aluminium silver or white finish. It shall have a power output of 20W, with an efficacy of 63lm/W. The luminaire shall deliver 1,260 luminaire lumens. Available in 3000K or 4000K, the luminaire shall be IK08 and IP65 rated. With a sleek aesthetic, DOT is perfect to suit any modern aesthetic for building perimeters.

Specification

Weight: 1.3 kg
Material: Die-cast Aluminium
Paint Finish: White

Optics



Symmetrical 130°

Product Description



DOT, a classic wall luminaire guaranteeing visual comfort for your scheme.

Key Features

- 20.0W
- 1,200 – 1,260 Luminaire Lumens
- Efficacy up to 63 lm/W
- 3000K & 4000K, CRI>80
- IP65, IK08
- Lifetime 60,000, L80
- Opal Comfort Screen
- Controls Compatible

IP65	IK08	60,000 hrs LIFETIME	4000K	
Colour Temperature	5 YEARS WARRANTY	Control Compatible		

Other Options Available

Contact for further details


- Colour Temperature Options

Body Type	A	B	C
Standard	209	209	89

All measurements in mm

Mounting Options

- Ceiling and Wall Mount

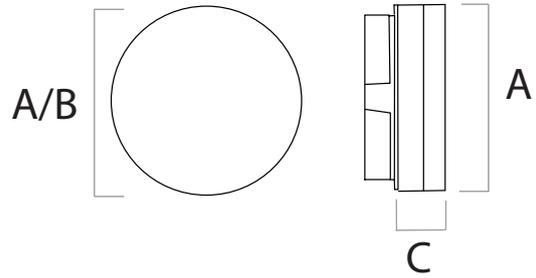

Code	Power (W)	Luminaire Lumens (lm)	Drive Current (mA)	Optic	CCT(K)	IP	IK	Weight (kg)	Driver Included	Driver Type
DOT-OP-SY130-830-20-11	20.0	1,200	350	Symmetrical 130°	3000	IP65	IK08	1.3	Yes	Fixed
DOT-OP-SY130-840-20-11	20.0	1,260	350		4000	IP65	IK08	1.3	Yes	Fixed