

Datasheet

GOTHIC 180 Series

Specification Text

The GOTHIC 180 shall be manufactured from with a die-cast aluminium body with an extruded aluminium pole. It shall be powder coated with a graphite grey or aluminium silver finish. It shall have a power output ranging between 19 - 36W, with an efficacy up to 49.0 lm/W. It shall produce 850 - 1,750 luminaire lumens.

The GOTHIC has radial, two way and three way distributions. It shall produce minimal upwards light. The luminaire shall come in 3000K and 4000K and be rated IK10 and IP66 with 710mm or 1000mm heights available.

Specification

Weight: 8.7 kg - 16.2 kg
Windage: 0.02 m² - 0.09 m²
Material: Die-cast Aluminium
Paint Finish: Graphite Grey

Product Description





 Arcluce

This angular bollard is guaranteed to add a modern edge to any scheme. GOTHIC offers a number of distribution options including radial, two or even three way illumination.

Key Features

- 19.0W - 36.0W
- 850 - 1,750 Luminaire Lumens
- Efficacy of up to 49.0 lm/W
- 3000K, 4000K, CRI>80
- IP66, IK10
- Lifetime < 60,000 hrs, L80
- Emergency Capabilities
- Anti-Glare Illumination

Optics

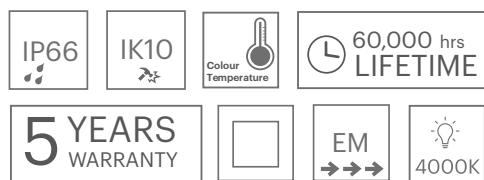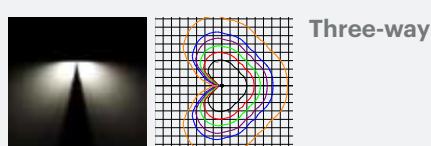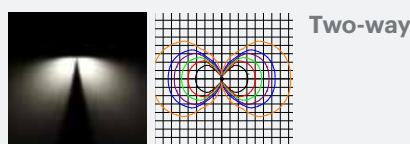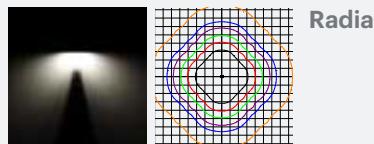

Other Options Available

Contact for further details


- Colour Temperatures: 3000K, 4000K

| Body Type | A | B | C |
|-------------|-----|-----|-------|
| GOTHIC 1M | 180 | 180 | 1,000 |
| GOTHIC 0.7M | 180 | 180 | 710 |

All measurements in mm

Mounting Options

- Flange Mount

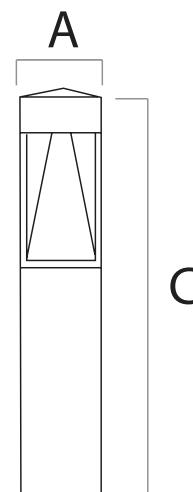

| Code | Power (W) | Luminaire Lumens (lm) | Drive Current (mA) | Optic | CCT(K) | IP | IK | Weight (kg) | Driver Included | Driver Type |
|-----------------------|-----------|-----------------------|--------------------|-----------|--------|------|------|-------------|-----------------|-------------|
| GOT1807-SYR-840-36-16 | 36.0 | 1,750 | 700 | Radial | 4000 | IP66 | IK10 | 8.7 | Yes | Fixed |
| GOT1801-SYR-840-36-16 | 36.0 | 1,750 | 700 | | 4000 | IP66 | IK10 | 15.2 | Yes | Fixed |
| GOT1807-2W-840-19-16 | 19.0 | 850 | 700 | Two-way | 4000 | IP66 | IK10 | 15.7 | Yes | Fixed |
| GOT1801-2W-840-19-16 | 19.0 | 850 | 700 | | 4000 | IP66 | IK10 | 16.2 | Yes | Fixed |
| GOT1807-3W-840-28-16 | 28.0 | 1,200 | 700 | Three-way | 4000 | IP66 | IK10 | 15.2 | Yes | Fixed |
| GOT1801-3W-840-28-16 | 28.0 | 1,200 | 700 | | 4000 | IP66 | IK10 | 15.7 | Yes | Fixed |