

Datasheet

MOD 2.0 Urban



Product Description

This diverse range of Italian made luminaires incorporates a modular bollard and tower, urban fitting and flood light option. With a variety of accessories to fit with full urban schemes, the MOD 2.0 series has everything needed for a growing cityscape.

Specification Text

The luminaire shall be manufactured from high-pressure die-cast aluminium. It shall have an LED efficacy of up to 126 lm/W and will be capable of producing up to 8,990 luminaire lumens at 4000K with a CRI >70. It shall have an asymmetric forward throw optic and is rated at IP66 and IK07.

Specification


Weight: 4.1 - 10.1kg
 Windage: 0.08-0.19m²
 Material: Die-cast Aluminium
 Paint finish: Graphite Grey

Key Features

- 21.5W - 102.0W
- 2,420 - 8,990 Luminaire Lumens
- Efficacy up to 126 lm/W
- 4000K, CRI >70
- Lifetime >100,000hr, L90




Dimensions

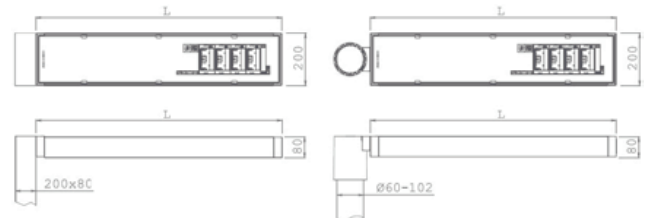

Length (L) options (mm) - 350, 500, 650, 800, 950

Optics

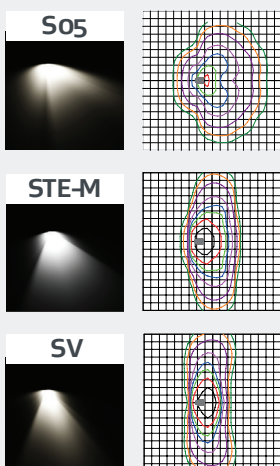

Code	Power	Luminaire Lumens	No. Modules	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Paint Finish	Driver Included	Driver Type
MOD23-SO5-4.7-1M1F	21.5	2,420	1	700	Asymmetrical Street Optic (S05)	4000	IP66	IK08	4.1	Graphite Grey	Driver inc	DALI
MOD25-SO5-4.7-1M1F	21.5	2,420	1	700		4000	IP66	IK07	5.4	Graphite Grey	Driver inc	DALI
MOD25-SO5-4.7-2M1F	40.0	4,720	2	700		4000	IP66	IK07	5.8	Graphite Grey	Driver inc	DALI
MOD29-SO5-4.7-4M1F	76.0	8,990	4	700		4000	IP66	IK07	10.1	Graphite Grey	Driver inc	DALI
MOD25-SV-4.7-1M1F	21.5	2,420	1	700	Asymmetrical Street Optic (SV)	4000	IP66	IK07	5.4	Graphite Grey	Driver inc	DALI
MOD25-SV-4.7-2M1F	40.0	4,720	2	700		4000	IP66	IK07	5.8	Graphite Grey	Driver inc	DALI
MOD25-STE-M4.7-2M1F	52.0	6,530	2	700	Asymmetrical Street Optic (STE-M)	4000	IP66	IK07	5.8	Graphite Grey	Driver inc	DALI
MOD26-STE-M4.7-2M1F	52.0	6,530	2	700		4000	IP66	IK07	10.1	Graphite Grey	Driver inc	DALI



Accessories & Options

Mounting Options

- Post Top 76mm
[Contact for details](#)

Dimming Options

- Available on request
[Contact for details](#)

Other Options

- Colour temperature options
- Paint finish options
[Contact for details](#)