

Datasheet

Stylo



Product Description

This award-winning luminaire is the perfect demonstration of sleek Italian design. Using reflector-based technology the STYLO offers excellent efficiency without compromising on performance.

Specification Text

The luminaire shall be manufactured from high-pressure die-cast aluminium. It shall have an LED efficacy of up to 126 lm/W and will be capable of producing up to 12,550 luminaire lumens at 4000K with a CRI >70. It shall have an asymmetric forward throw optic and is rated at IP66 and IK07.

Specification


Weight: 10.0kg
 Windage: 0.09-0.25m²
 Material: Die-cast Aluminium
 Paint finish: Graphite Grey

Key Features


- 21.5W - 102.0W
- 2,420 - 12,550 Luminaire Lumens
- Efficacy up to 126 lm/W
- 4000K, CRI >70
- Lifetime >100,000hr, L90
- Toolless Entry



Dimensions

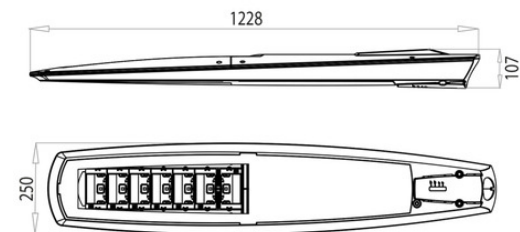

Optics

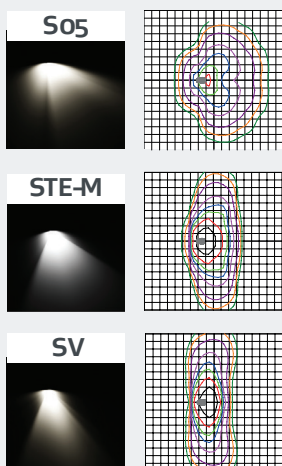

Code	Power	Luminaire Lumens	No. Modules	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Paint Finish	Driver Included	Driver Type
STY-S05-4.7-1M1F	21.5	2,420	1	700	Asymmetrical Street Optic (S05)	4000	IP66	IK07	10.0	Graphite Grey	Driver inc	DALI
STY-S05-4.7-2M1F	40.0	4,720	2	700		4000	IP66	IK07	10.0	Graphite Grey	Driver inc	DALI
STY-S05-4.7-4M1F	76.0	8,990	4	700		4000	IP66	IK07	10.0	Graphite Grey	Driver inc	DALI
STY-SV-4.7-1M1F	21.5	2,420	1	700	Asymmetrical Street Optic (SV)	4000	IP66	IK07	10.0	Graphite Grey	Driver inc	DALI
STY-SV-4.7-2M1F	40.0	4,720	2	700		4000	IP66	IK07	10.0	Graphite Grey	Driver inc	DALI
STY-STE-M4.7-2M1F	52.0	6,530	2	700	Asymmetrical Street Optic (STE-M)	4000	IP66	IK07	10.0	Graphite Grey	Driver inc	DALI
STY-STE-M4.7-4M1F	102.0	12,550	4	700		4000	IP66	IK07	10.0	Graphite Grey	Driver inc	DALI

Accessories & Options

Mounting Options

- Side Entry 42-60mm
[Contact for details](#)

Dimming Options

- Constant light output
- Programmable
- Part night dimming
- Step dimming
- Wireless dimming
[Contact for details](#)

Other Options

- Colour temperature options
- Paint finish options
[Contact for details](#)

