

# Datasheet

## VILLA II




### Specification Text

The VILLA II shall be manufactured from high pressure die-cast aluminium and be powder coated with a RAL 9005 Jet Black finish. It shall have a power output ranging from 30 – 60W with an efficacy of 130.0 lm/W. It shall produce 3,588 - 7,270 luminaire lumens. Available in 2700K and 4000K, VILLA II is rated at IP66 and IK08.

### Specification

Weight:	10.7 - 10.8kg
Windage:	0.35m <sup>2</sup>
Material:	Die-cast Aluminium
Paint Finish:	RAL7016 Anthracite Grey
Embodied Carbon:	126 - 128

### Optics



Symmetrical 127°

### Product Description

With a traditional heritage look, VILLA II is the amenity lantern with varying colour temperatures and outputs to promote high efficiency for many sites.

### Key Features

- 30.0 - 60.0W
- 3,588 - 7,270 Luminaire Lumens
- Efficacy up to 130.0W
- 2700K, 4000K, CRI>70
- IP66, IK08
- Lifetime > 100,000hr, L80
- Dim to Warm Options
- Comfort Options
- 3 Hour Integral Emergency

IP66	IK08	100,000 hrs LIFETIME	5 YEARS WARRANTY
EM →→→	PEC ☀️	2700K	4000K

Circular Economy Score	
0 to 0.05	Very poor circular economy performance
0.5 to 1.5	Some circular economy functionality
1.5 to 2.5	Definite/substantial progress to circularity
2.5 to 4.0	Excellent circularity


# Mounting Options

- Post Top 60mm

Body Type	A	B	C	D
Standard	816	425	425	60

All measurements in mm

Body Type	A	B	C
Standard	816	425	425

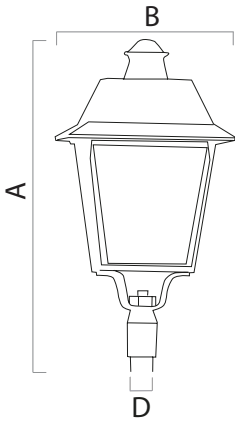

Code	Power	Luminaire Lumens	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Driver Included	Driver Type
VIL30D-02	30.0	3,900	780	Symmetrical 127°	4000	IP66	IK08	10.7	Yes	DALI
VIL30D27K-02	30.0	3,588	780		2700	IP66	IK08	10.7	Yes	DALI
VIL60D-02	60.0	7,270	610		4000	IP66	IK08	10.7	Yes	DALI
VIL60D27K-02	60.0	6,688	610		2700	IP66	IK08	10.7	Yes	DALI