



# Kingfisher Lighting

## Datasheet

### Viva-City Flood



#### Specification Text

The luminaire shall be manufactured from high pressure die-cast aluminium. It shall have an LED efficacy of up to 137.5 luminaire lm/W and will be capable of producing up to 16494 luminaire lumens at 4000K with a CRI >70. It shall have a radial distribution and is IP66 and IK08.

#### Specification

Weight: 7.9 - 8.2 kg


Windage: 0.03m<sup>2</sup>

Material: Die-cast Aluminium


Paint Finish: Anthracite Grey

#### Key Features


- 60W - 120W
- 9,900 - 19,200 Luminaire Lumens
- Efficacy up to 137.5 lm/W
- 2700K
- Lifetime >100,000hr
- Asymmetrical
- Bracket adjustment for site leveling fixed to +/- 10°



#### Optics

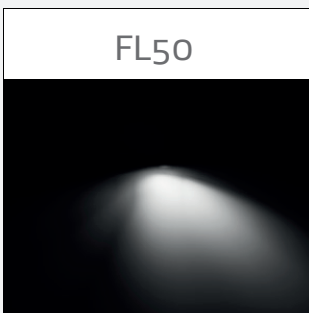

#### Dimensions

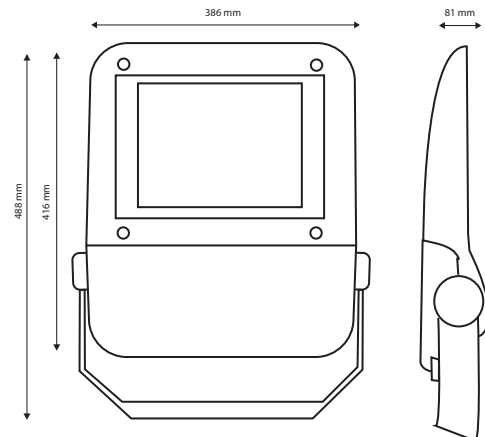

All measurements in mm

Code	Power	Light Source	Luminaire Lumens	Optic	CCT(K)	IP	IK	Weight (kg)	Paint Finish
VCYF-FL50-4.6-60D	60.0	LED	8247	Asymmetrical	4000	IP66	IK08	5.2	Antracite Grey
VCYF-FL50-4.6-60DPEC	60.0	LED	8247		4000	IP66	IK08	6.5	Antracite Grey
VCYF-FL50-4.8-120D	120.0	LED	16494	Flood Optic - 50°	4000	IP66	IK08	6.6	Antracite Grey
VCYF-FL50-4.8-120DPEC	120.0	LED	16494		4000	IP66	IK08	6.7	Antracite Grey



### Accessories / Options

- Photocell option
- Dimming option

### Mounting Options

- Surface mount bracket



