


Datasheet

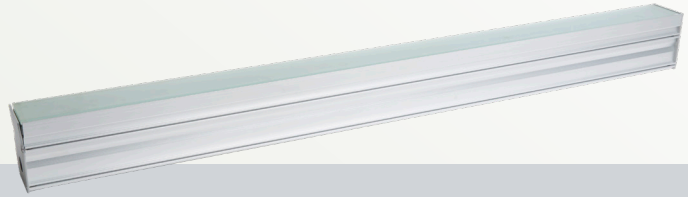

Veron

Product Description

This sleek, low energy luminaire is perfect for linear architectural lighting installations.

Specification Text

The luminaire shall be manufactured from high-pressure Extruded Aluminium. It shall have an LED efficacy of up to 42.0 lm/W and will be capable of producing up to 500 luminaire lumens at 4000K with a CRI >80. It shall have a symmetrical optic and is rated at IP67 and IK09.

Specification

Weight: 5.0kg
Material: Extruded Aluminium
Paint finish: Aluminium Finish

Key Features


- 12.0W
- 500 Luminaire Lumens
- Efficacy up to 42.0 lm/W
- 4000K, CRI >70
- Lifetime >100,000hr, L80



Mounting Options

- Recess Mount

Optics



Symmetrical 100°

Code	Power	Luminaire Lumens	Optic	CCT(K)	IP	IK	Weight kg	Paint Finish	Driver Included
VER-SY100-740-OPAL-12	12.0	500	Symmetrical 100°	4000	IP67	IK09	5.0	Aluminium	Driver not Included



Dimensions



All measurements in mm