

Datasheet

KRANE



Specification Text

The KRANE shall be manufactured from die-cast aluminium with an extruded aluminium body and powder coated with a graphite grey or aluminium silver finish. It shall have a power output of 39.0 - 81.0W, with an efficacy of 76lm/W. It shall produce 2,700 - 5,900 luminaire lumens. The KRANE is available with symmetrical optics for urban projects. Available in 3000K or 4000K, the luminaire shall be IK10 and IP66 rated.

Specification

Weight:	7.3 - 12.2kg
Windage:	0.15 - 0.25m²
Material:	Die-cast Aluminium
Paint Finish:	Graphite Grey


Product Description

With a contemporary design, Krane offers an ultra modern aesthetic to any urban landscape. Available with a choice of output, colour temperature and low glare solutions.


Key Features

- 39.0 - 81.0W
- 2,700 – 5,900 Luminaire Lumens
- Efficacy up to 76 lm/W
- 3000K, 4000K, CRI>80
- IP65, IP66, IK08, IK10
- Lifetime 60,000, L80


Optics



Radial



One-way



Two-way




Mounting Options

- Post Top 60mm

Body Type	A	B	C
KRANE Single	950	296	102
KRANE Double	1600	296	102

All measurements in mm

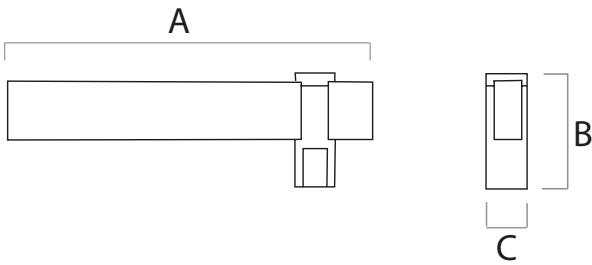

Code	Power	Luminaire Lumens	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Driver Included	Driver Type
KRA-SYU-840-39-16	39.0	2,950	-	Symmetrical Urban Optic	4000	IP66	IK10	7.3	Yes	Fixed
KRA-SYU-830-39-16	39.0	2,700	-		3000	IP66	IK10	7.3	Yes	Fixed
KRAD-SYU-840-81-16	25.0	1,400	-		4000	IP66	IK10	12.2	Yes	Fixed
KRAD-SYU-830-81-16	14.0	700.0	-		3000	IP68	IK08	7.7	Yes	Fixed