

Datasheet

Miko Bollard



Product Description

The Miko bollard is a stylish accompaniment for any modern scheme. Combine with the Miko wall lantern and create a modern, yet uniform scheme.


Specification Text

The luminaire shall be manufactured from high-pressure die-cast aluminium. It shall have an LED efficacy of up to 78 lm/W and will be capable of producing up to 1,550 luminaire lumens at 4000K with a CRI >80. It shall have an asymmetric forward throw optic and is rated at IP66 and IK08.

Specification

Weight: 3.5kg
 Windage: 0.08m²
 Material: Die-cast Aluminium
 Paint finish: Aluminium Silver Finish

Optics




Radial

Key Features

- 20.0W
- 1,550 Luminaire Lumens
- Efficacy up to 78 lm/W
- 4000K, CRI >80
- Lifetime >60000hr, L80



Dimensions

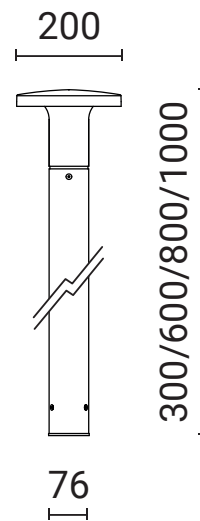

Code	Power	Luminaire Lumens	Optic	CCT(K)	IP	IK	Weight kg	Paint Finish	Driver Included
MIKB-SYR-840-20-21	20.0	1,550	Radial	4000	IP66	IK08	3.5	Aluminium Silver Finish	Driver inc



Accessories & Options

Mounting Options

- Galvanized, Painted Steel Base Plate
[Contact for details](#)

Other Options

- Colour Temperature Options
- Paint Finish Options
[Contact for details](#)