

Datasheet

Pantheon



Product Description

The powerful flood light is available in an array of optics and versatile mounting options to deliver different lighting effects.


Specification Text

The luminaire shall be manufactured from high-pressure die-cast aluminium. It shall have an LED efficacy of up to 106 lm/W and will be capable of producing up to 8400 luminaire lumens at 4000K with a CRI >80. It shall have an asymmetric forward throw optic and is rated at IP67 and IK08.

Specification

Weight: 9.7kg
 Windage: 0.09m²
 Material: Die-cast Aluminium
 Paint finish: Aluminium Silver Finish

Optics

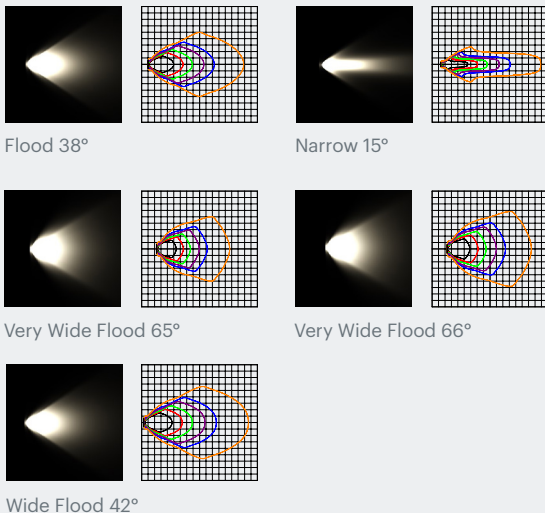


Key Features



- 41.0 - 79.0W
- 3,250 - 8,400 Luminaire Lumens
- Efficacy up to 106 lm/W
- 4000K, CRI >80
- Lifetime >60000hr, L80



Dimensions

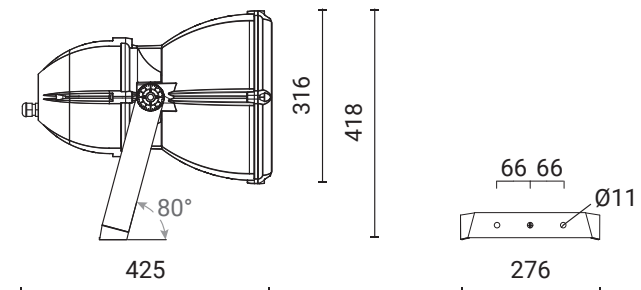

Code	Power	Luminaire Lumens	Optic	CCT(K)	IP	IK	Weight kg	Paint Finish	Driver Included
PAN2-SY15-840-79-21	79.0	8,400	Narrow 15°	4000	IP67	IK08	9.7	Aluminium Silver Finish	Driver inc
PAN2-SY38-840-41-21	41.0	3,750	Flood 38°	4000	IP67	IK08	9.7	Aluminium Silver Finish	Driver inc
PAN2-SY42-840-79-21	79.0	7,550	Wide Flood 42°	4000	IP67	IK08	9.7	Aluminium Silver Finish	Driver inc
PAN2-SY65-840-41-21	41.0	3,250	Very Wide Flood 65°	4000	IP67	IK08	9.7	Aluminium Silver Finish	Driver inc
PAN2-SY66-840-79-21	79.0	6,600	Very Wide Flood 66°	4000	IP67	IK08	9.7	Aluminium Silver Finish	Driver inc



Accessories & Options

Mounting Options

- Stirrup Mount
[Contact for details](#)

Other Options

- Constant Light Output
- Programmable
- Part Night Dimming
- Step Dimming
- Wireless Controls
- Colour Temperature Options
- Paint Finish Options
[Contact for details](#)