

# Datasheet

## Artelys



### Product Description

This Italian made luminaire offers excellent efficiency and high-performance. With a choice of optics and its elegant design, ARTELYS lends itself to a wide range of applications.

### Specification Text

The luminaire shall be manufactured from high-pressure die-cast aluminium. It shall have an LED efficacy of up to 123 lm/W and will be capable of producing up to 12,300 luminaire lumens at 4000K with a CRI >70. It shall have an asymmetric forward throw optic and is rated at IP66 and IK08.

### Specification


- Weight: 7.0-11.0kg
- Windage: Artelys 350: 0.08 - 0.4m<sup>2</sup>  
Artelys 460: 0.13 - 0.64m<sup>2</sup>
- Material: Die-cast Aluminium
- Paint finish: Graphite Grey

### Key Features


- 21.5W - 102.0W
- 2,420 - 12,300 Luminaire Lumens
- Efficacy up to 123 lm/W
- 4000K, CRI >70
- Lifetime >100,000hr, L90



### Dimensions

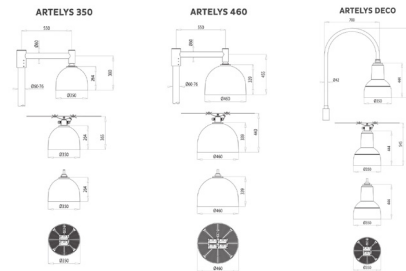

### Optics

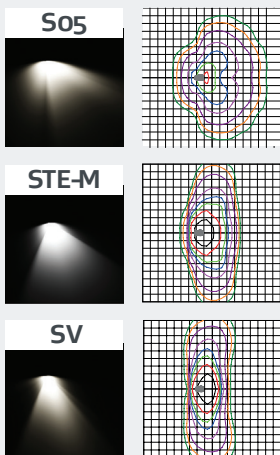

Code	Power	Luminaire Lumens	No. Modules	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Paint Finish	Driver Included	Driver Type
ART350-SO5-4.7-1M1F	21.5	2,370	1	700	Asymmetrical Street Optic (SO5)	4000	IP66	IK08	7.0	Graphite Grey	Driver inc	DALI
ART350-SO5-4.7-2M1F	40.0	4,630	2	700		4000	IP66	IK08	7.0	Graphite Grey	Driver inc	DALI
ART460-SO5-4.7-1M1F	21.5	2,370	1	700		4000	IP66	IK08	11.0	Graphite Grey	Driver inc	DALI
ART460-SO5-4.7-2M1F	40.0	4,630	2	700		4000	IP66	IK08	11.0	Graphite Grey	Driver inc	DALI
ART460-SO5-4.7-4M1F	76.0	8,810	4	700		4000	IP66	IK08	11.0	Graphite Grey	Driver inc	DALI
ART350-SV-4.7-1M1F	21.5	2,370	1	700	Asymmetrical Street Optic (SV)	4000	IP66	IK08	7.0	Graphite Grey	Driver inc	DALI
ART350-SV-4.7-2M1F	40.0	4,630	2	700		4000	IP66	IK08	7.0	Graphite Grey	Driver inc	DALI
ART460-SV-4.7-1M1F	21.5	2,370	1	700		4000	IP66	IK08	11.0	Graphite Grey	Driver inc	DALI
ART460-SV-4.7-2M1F	40.0	4,630	2	700		4000	IP66	IK08	11.0	Graphite Grey	Driver inc	DALI
ART350-STE-M-4.7-2M1F	52.0	6,400	2	700	Asymmetrical Street Optic (STE-M)	4000	IP66	IK08	7.0	Graphite Grey	Driver inc	DALI
ART460-STE-M-4.7-2M1F	52.0	6,400	2	700		4000	IP66	IK08	11.0	Graphite Grey	Driver inc	DALI
ART460-STE-M-4.7-4M1F	102.0	12,300	4	700		4000	IP66	IK08	11.0	Graphite Grey	Driver inc	DALI



## Accessories & Options

### Mounting Options

- Suspended Mount 1/2" Gas Connection  
[Contact for details](#)

### Dimming Options

- Constant light output
- Programmable
- Part night dimming
- Step dimming
- Wireless dimming  
[Contact for details](#)

### Other Options

- Colour temperature options
- Paint finish options  
[Contact for details](#)