



Kingfisher Lighting

Datasheet

Geomis

Designed with both style and function in mind, this decorative bollard houses a polycarbonate diffuser and stepped louvre to give an elegant, symmetrical distribution.



Key Features

- Luminaire Lumens 1,105
- LED Lumens 1,502
- Power 25W
- Luminaire efficacy up to 44.2 lm/W
- 4000K, CRI >70
- Lifetime >50,000hr
- Flange plated
- Bolt on root mounted



Optics

Geomis	Symmetrical
---------------	-------------


Applications

- Urban environment
- Residential
- Hospitality & leisure
- Retail
- Commercial
- Pathways & parks

Specification Text

The luminaire shall be manufactured from high pressure die-cast aluminium. It shall be capable of producing up to 1105 luminaire lumens at 4000K with a CRI >70. The luminaire will be rated IP65 and IK08.

Dimensions

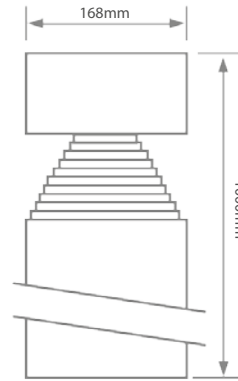

Specifications

Weight	6.70 kg
Material	Die-cast aluminium
Paint Finish	Anthracite grey

Code	Power	Light Source	Luminaire Lumens	Optic	CCT(K)	IP	Weight (kg)	Paint Finish	Product Type
LED									
GEO25KGF	25W	LED	1105	Symmetrical Radial Illumination	4000	IP65	6.70	Anthracite grey RAL 7016	Fixed

Accessories / Options

Photocell options	Contact us for details
-------------------	------------------------