

Datasheet

HELVELLYN 2.0




Specification Text

The HELVELLYN 2.0 shall be manufactured from stainless steel. It shall have a power output ranging between 7.5/15.0W, with an efficacy of 124.0lm/W. The luminaire shall deliver 730 - 1,860 luminaire lumens. The HELVELLYN 2.0 has radial optics to suit pedestrian, pathway and retail applications. Available in 2700K and 4000K, the luminaire shall be IK08 and IP65 rated. It shall have photocell and emergency options available.

Specification

Weight:	10.3 - 10.6kg
Material:	Die-cast Aluminium
Paint Finish:	Stainless Steel

Optics




Radial

Product Description

Designed with a sleek, stainless steel body, HELVELLYN 2.0 features an on-site adjustable output and is available in different colour temperatures.

Key Features

- 7.5/15W
- 730 - 1860 Luminaire Lumens
- Efficacy up to 124.0 lm/W
- 2700K, 4000K, CRI>70
- IP65 & IK08
- Lifetime 50,000, L70
- Bolt on Root Option
- Colour Temperature Opportunities
- 180° Glare Shield

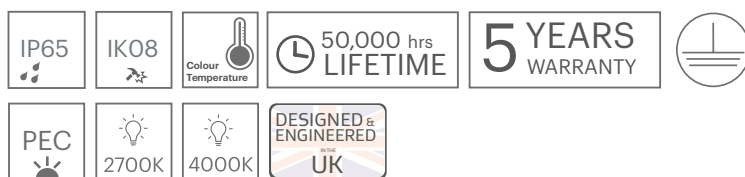

Mounting Options

- Flange Mount

Body Type	A	B	C
Standard	180	180	1040

All measurements in mm



Code	Power	Luminaire Lumens	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Driver Included	Driver Type
HEL715	7.5/15	930/1860	250/500	Radial	4000	IP65	IK08	10.3	Yes	Fixed
HEL715PEC	7.5/15	930/1860	250/500		4000	IP65	IK08	10.4	Yes	Fixed
HEL715EM	7.5/15	930/1860	250/500		4000	IP65	IK08	10.5	Yes	Fixed
HEL715EMPEC	7.5/15	930/1860	250/500		4000	IP65	IK08	10.6	Yes	Fixed
HEL71527K	7.5/15	730/1400	250/500		2700	IP65	IK08	10.3	Yes	Fixed
HEL71527KPEC	7.5/15	730/1400	250/500		2700	IP65	IK08	10.4	Yes	Fixed
HEL71527KEM	7.5/15	730/1400	250/500		2700	IP65	IK08	10.5	Yes	Fixed
HEL71527KEMPEC	7.5/15	730/1400	250/500		2700	IP65	IK08	10.6	Yes	Fixed