

Datasheet

MOD 2.0 Bollard & Tower



Product Description

This diverse range of Italian made luminaires incorporates a modular bollard and tower, urban fitting and flood light option. With a variety of accessories to fit with full urban schemes, the MOD 2.0 series has everything needed for a growing cityscape.

Specification Text

The luminaire shall be manufactured from high-pressure die-cast aluminium. It shall have an LED efficacy of up to 95 lm/W and will be capable of producing up to 1,520 luminaire lumens at 4000K with a CRI >70. It shall have an asymmetric forward throw optic and is rated at IP66 and IK08.

Specification

Weight: 19.0 - 84.5kg

Material: Die-cast Aluminium


Paint finish: Graphite Grey

Key Features


- 11.0W-16.0W
- 1,050 - 1,520 Luminaire Lumens
- Efficacy up to 95 lm/W
- 4000K, CRI >70
- Lifetime >100,000hr, L90



Dimensions

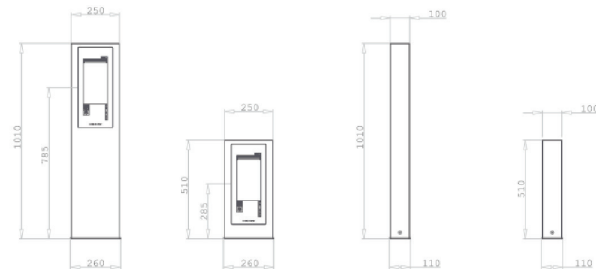

Optics



Code	Power	Luminaire Lumens	No. Modules	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Paint Finish	Driver Included	Driver Type
MOD2B1.0-SO5-4.3-1M1F	11.0	1,050	1	350	Asymmetrical Street Optic (S05)	4000	IP66	IK08	19.0	Graphite Grey	Driver inc	DALI
MOD2T3-SO5-4.5-1M1F	16.0	1,520	1	525		4000	IP66	IK08	47.5	Graphite Grey	Driver inc	DALI
MOD2T4-SO5-4.5-1M1F	16.0	1,520	1	525		4000	IP66	IK08	59.5	Graphite Grey	Driver inc	DALI
MOD2TS-SO5-4.5-1M1F	16.0	1,520	1	525		4000	IP66	IK08	69.5	Graphite Grey	Driver inc	DALI
MOD2T6-SO5-4.5-1M1F	16.0	1,520	1	525		4000	IP66	IK08	84.5	Graphite Grey	Driver inc	DALI



Accessories & Options

Mounting Options

- Bollard - Flange Mounted
- Tower - Rooted or Flange Mounted

Dimming Options

- Available on request
[Contact for details](#)

Other Options

- Colour temperature options
- Paint finish options
[Contact for details](#)