


Datasheet

Zactis

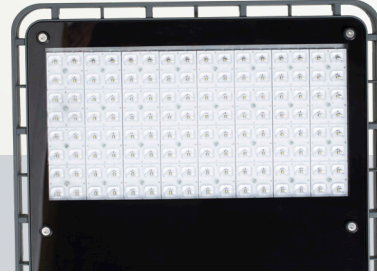

Product Description

Zactis is a high-performance flat-to-ground LED flood light perfect for sports, high mast and area applications. As well as facilitating easy installation and maintenance, the sleek, low-profile design, reduces the load together with decreasing windage.


Specification Text

The luminaire shall be manufactured from high-pressure die-cast aluminium. It shall have an LED efficacy of up to 138.0 lm/W and will be capable of producing up to 44,156 luminaire lumens at 4000K with a CRI >70. It shall have an asymmetric forward throw optic and is rated at IP65 and IK08.

Specification

Weight: 15.0 - 16.5kg
 Windage: 0.1m²
 Material: Die-cast Aluminium
 Paint finish: RAL7016 Anthracite
 Grey Marine Grade Finish

Optics




Asymmetrical Forward Throw Optic

Key Features

- 125.0 - 320.0W
- 17,125 - 44,156 Luminaire Lumens
- Efficacy up to 138.0 lm/W
- 4000K, CRI >70
- Lifetime >100,000hr, L70



Dimensions

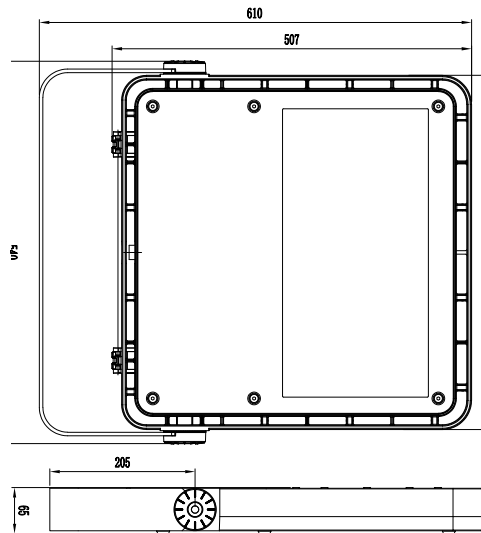

Code	Power	Luminaire Lumens	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Paint Finish	Driver Included
ZAC-FW70-4.5-125D	125.0	17,686	645	Asymmetrical Forward Throw Optic - 70°	4000	IP65	IK08	15.0	RAL7016 Anthracite Grey Marine Grade Finish	Driver inc
ZAC-FW70-4.7-160D	160.0	22,800	808		4000	IP66	IK08	15.0	RAL7016 Anthracite Grey Marine Grade Finish	Driver inc
ZAC-FW70-4.5-250D	250.0	35,836	645		4000	IP66	IK08	16.5	RAL7016 Anthracite Grey Marine Grade Finish	Driver inc
ZAC-FW70-4.7-320D	320.0	46,768	808		4000	IP66	IK08	16.5	RAL7016 Anthracite Grey Marine Grade Finish	Driver inc

Accessories & Options

Mounting Options

- Stirrup Mount
[Contact for details](#)

Other Options

- Part Night Dimming
- Colour Temperature Options
- Photocell Option
[Contact for details](#)

